


Operating Instructions

Combination Lock 7800

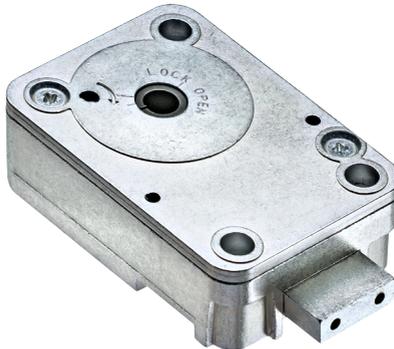

1 General instructions

- **Please read the operating instructions carefully, before activating the lock.**
- The lock is supplied with the factory code "50".
For your security, you have to change the factory code immediately.
- Change code only if the safe is opened and lock is in closed position.
- Each number has to be at least 4 numbers apart from the others.
- Do not use any personal data like birthdays or telephone numbers as new code.
- Keep the code and the change key in a safe place.
- Always turn the dial slowly and carefully. You may stop as often as wanted. On the last turn for each code number, stop exactly when the code number is in line with the Opening Index. In case you turned too far, you cannot correct this by turning back. In case of an error, start over by beginning with the first code number.
- Do not use any force.

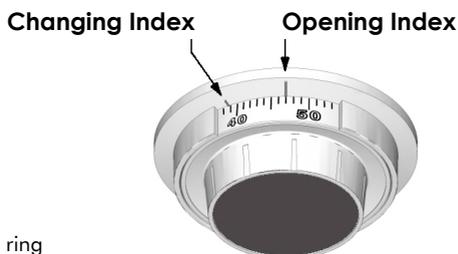


Fig. 1: Scale dial & ring

4 Changing the factory code

Use the **Changing Index**. Before setting a new combination, open the safe door and close the lock (bolt extended).

Dial the existing factory code "50" using the **Changing Index**.

1.	Turn LEFT and pass "50" once and stop exactly on "50" on the Changing Index the second time.	2 x 
2.	Turn RIGHT until the dial stops. The Lock is opened.	
3.	Turn LEFT and stop exactly on "50" on the Changing Index .	1 x 
4.	Carefully insert change key on the inside of the safe door. Slightly wiggle if necessary. Turn change key as shown clockwise to the stop (approx. 90 degree) (see Fig. 2, page 3).	
5.	Now dial the new code!	
6.	Turn LEFT, pass first code number three times and stop exactly on the number on the Changing Index the fourth time.	4 x 
7.	Turn RIGHT, pass second code number twice and stop exactly on the number on the Changing Index the third time.	3 x 
8.	Turn LEFT, pass third code number once and stop exactly on the number on the Changing Index the second time. The third number must be higher than 20.	2 x 
9.	After the new code is completely entered, turn change key LEFT and remove it. The new code is installed.	

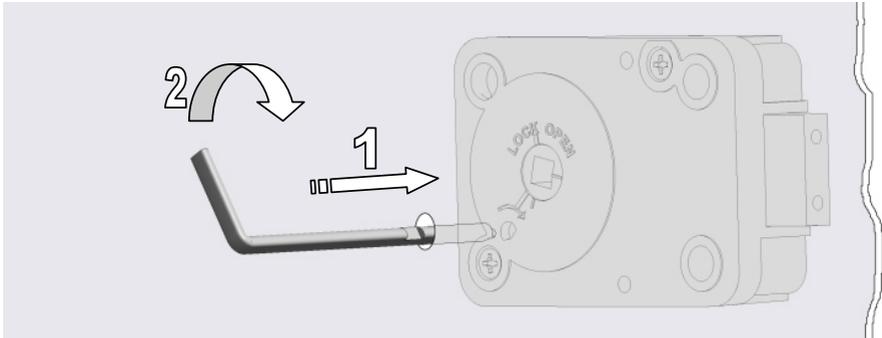


Fig. 2: Insertion of change key

2 Opening

Use the **Opening Index**. The factory code is 10 – 20 – 30.

1.	Turn LEFT and pass "10" three times and stop exactly on "10" on the Opening Index the fourth time.	4 x ↺
2.	Turn RIGHT and pass "20" twice and stop exactly on "20" on the Opening Index the third time.	3 x ↻
3.	Turn LEFT and pass "30" once and stop exactly on "30" on the Opening Index the second time.	2 x ↺
4.	Turn RIGHT until the dial stops. The dial should stop between 90 and 95 on the Opening Index . The Lock is opened.	↻

3 Locking

Turn at least four complete turns LEFT.

4 Changing the code

Use the **Changing Index**. Before setting a new combination, open the safe door and close the lock (bolt extended).

Dial the existing code using the **Changing Index**, for example 10 – 20 – 30.

1.	Turn LEFT and pass "10" three times and stop exactly on "10" on the Changing Index the fourth time.	4 x 
2.	Turn RIGHT and pass "20" twice and stop exactly on "20" on the Changing Index the third time.	3 x 
3.	Turn LEFT and pass "30" once and stop exactly on "30" on the Changing Index the second time.	2 x 
4.	Carefully insert change key on the inside of the safe door. Slightly wiggle if necessary. Turn change key as shown clockwise to the stop (approx. 90 degree) (see Fig. 2, page 3).	
5.	Now dial the new code!	
6.	Turn LEFT, pass first code number three times and stop exactly on the number on the Changing Index the fourth time.	4 x 
7.	Turn RIGHT, pass second code number twice and stop exactly on the number on the Changing Index the third time.	3 x 
8.	Turn LEFT, pass third code number once and stop exactly on the number on the Changing Index the second time. The third number must be higher than 20.	2 x 
9.	After the new code is completely entered, turn change key LEFT and remove it. The new code is installed.	

If the change key cannot be inserted or turned in step 4, the correct code has not been dialed to the **Changing Index** on the dial. Take out the key and dial the valid code again. If you turned the dial too far, start over by beginning with the first code number.

Try the new code several times (using Opening Index) before closing the door!